

RESIDENTIAL CATALOG



CONSTRUCTION SUPPLIES



1916

Arthur H Harris founds a trucking company in New Britain, CT.

1936

The company moves to a larger facility.



Art expands the construction products line.

1950's

The company adds an office in Massachusetts.



Offices in Albany NY and Newark, NJ open in 1969 and the Portsmouth NH office opens in 1979.



1964

Art's four sons - Dick, Bob, Rod and Archie - take over the management of the company.



1980's

Over the years, the company expands its product lines, customer base and market interests.

1993

The Harris brothers sell the company to Bob Parsons and Bob Fisher.



2002

A.H. Harris acquires its rebar fabricating division, HarMac Rebar and Steel Corporation, headquartered in Fryeburg, ME.



2006

A.H. Harris celebrates its 90th anniversary.

Company Profile

Today

the company has 41 locations in 11 states from Maine to North Carolina. A.H. Harris now serves the heavy & highway, commercial, industrial and residential markets specializing in areas of concrete formwork and accessories, concrete repair and restoration, geotextiles and erosion control. A.H. Harris represents some 300 manufacturers and over 3500 products.

The A.H. Harris Sales Force

Outside Sales:

Harris Account Managers provide in-depth product knowledge, on-the-job assistance and application advice. Our customers get the right product at the right time with the expert consultation that ensures their projects' success.

Inside Sales:

Harris inside sales solve problems and answer questions. They give customers up-to-date advice on product usage, availability and options so customers can make the right choice, for the right reasons, every time.

For more information or to contact an A.H. Harris location visit our website:

www.ahharris.com

A.H. Harris & Sons, Inc.



CONSTRUCTION SUPPLIES

RESIDENTIAL CATALOG

TABLE OF CONTENTS

HARRIS 1500	2
TRUFORM.	2
Steel Dog Accessories.	2
Form Release	3
Form Liners	3
Western Forms Aluminum Forming Systems	4
PolySteel® Insulated Concrete Forms	4
HarMac Rebar and Rebar Fabrication	4
Sonoco Sonotube® Forms with Rainguard™	4
Windows & Vents.	5
Concrete Flatwork Forming System	6
Decorative Concrete	6
Drainage Systems	6
Vapor Barrier	6, 8
Fibre Expansion Joint	7
Cure & Seal	7
Sealants.	7
CREDIT APPLICATION	9-12
Waterproofing	13-14
Foundation and Cavity Wall Coating	14
Insulation and Drainage Boards	14
Basement Crack Repair Kits	15
Repair & Restoration	15-16
Sitework.	17-18
Tools & Accessories.	19-20

Harris 1500 Clamp System



A.H. Harris announces the availability of the best hand set clamp system in the world.

- Harris 1500 is 100% made in the USA for the USA market.
- The panels and accessories were designed and manufactured in imperial dimensions.
- The hardware is designed and field tested to be fast and simple to use.

Modular Versatility

HARRIS 1500™ is a modular design suitable for handset or gang form applications.

- The only handset clamp system with five different panel heights.
- HARRIS 1500™ is designed and tested for a 1500 PSF – The highest handset pour rating in the world.
- The unique panel design is so innovative that there is No Top or Bottom.
- HARRIS1500™ clamps eliminate the need for horizontal walers even when moving large gangs. The patented clamp only weighs 7 pounds and completely aligns the form with one hammer strike.



System Strength

- HARRIS 1500™ is manufactured with 70ksi steel frames.
- Frames and accessories are all hot dipped galvanized to ensure a long service life.
- The unique corner casting protects the panel frame from jobsite abuse.
- The form face is nine ply ½” birch plywood with a plastic resin overlay on both sides to provide a high quality concrete finish and extended panel life.

Handset Capability

- The HARRIS 1500™ system only weighs 6 lbs per SF.
- The panels quickly clamp together to create the fastest setting handset systems.
- System transitions from a hand set system to a gang form system instantly.
- No additional hardware is required to cycle formwork from placement to placement.

Harris TRUFORM™

TRUFORM™ is manufactured by Steel Dog® and is available exclusively from A.H. Harris.



- 11 ply structural grade HDO Douglas fir plywood provides high strength and maximum durability
- Entire panel is precision-machined on all four sides for unexcelled precision in width, length, and squareness
- Both the inside and outside edges are chamfered, for longer panel life and easier handling
- Plywood panel corners rounded for greater resistance to abuse
- All plywood edges sealed and strengthened with two coats of industrial epoxy paint for long life
- High-strength steel panel bars, formed with extra deep reinforcement for greater strength
- Rust resistant zinc plating on panel bars and fasteners

Steel Dog Accessories

A.H. Harris carries Steel Dog Concrete Accessories including:

- | | |
|------------------|-------------------|
| • Tie Breaker | • Waler Bracket |
| • “E” Clip | • Loop Coil™ Tie |
| • Offset Clip | • Snap Coil™ Tie |
| • Stacking Clip | • Aluma Coil™ Tie |
| • Resi-Coil™ Tie | • Footing Bracket |
| | • Foam Nails |



Form Release Agents

Harris Green Pro-Release

An economical, water based, general purpose concrete form release agent that combines both chemically active and barrier-type components for improved performance with most concrete mix designs, including mix designs incorporating pozzolans such as fly ash or blast furnace slag.



Nox-Crete™ Form Coating

General purpose form release agent. For use with plywood, lumber, HDO and MDO forms. Also can be used on steel, plastic and fiberglass.

Nox-Crete™ Alumi-Nox E

Chemically active form release agent for aluminum forms. Reduces bug holes and minimizes concrete buildup.

Nox-Crete™ Form Coating 250

Chemically reacts upon contact with fresh concrete, positively preventing bonding with the form surface. Byproducts of this reaction waterproof wood forms, extending their usable life. On steel forms, an iron soap is formed which minimizes the formation of rust.



Harris Super X VOC Form Release Agent

An acid neutral, premium, hydrocarbon oil carrier, release agent formulated to provide superior performance in a VOC compliant system for plywood forming systems.

Western Forms Blue Ribbon Form Release Agent

Designed specifically for superior care on aluminum forms only.



Form Liners

Enhance concrete appearance with form liner textures.

- Available in wood grain, stone, brick, and a variety of ribbed and other textures.

Forming



Western Forms Aluminum Forming Systems

Save time and money by choosing a reusable, cost effective aluminum forming system. Lower cost per use than wood or steel forms.

- Superior wall finish-less pillowing, less deflection, less concrete sticking with pre-seasoned forms.
- Lasts over 3000 pours.
- PinLock™ provides labor efficiency with less training.

PolySteel® Insulated Concrete Forms

Distance yourself from the competition and set a new standard for quality, comfortable and energy-efficient construction with PolySteel®.

- A home with walls of PolySteel® is more comfortable, more energy efficient and more secure than conventionally built homes.
- Average energy savings of 30%-80%.
- Polysteel® homes are protected from common problems like mold and termites.



HarMac Rebar and Rebar Fabrication

Save time and money with fully fabricated steel available from HarMac and A.H. Harris:

- Pier Boots
- Box Culverts
- Columns
- Radius Panels
- Wire Mesh (standard, galvanized and epoxy)
- Reinforcing Steel (Black, Epoxy, Welded, Galvanized, Stainless & Fiberglass)
- Accessories (dowel bar subs, anchors, bolts & more)
- Pre-fabricated welded cages



Many of our satellite locations offer rebar fabrication available for small to midsize jobs where unanticipated changes or needs can occur.

Sonoco Sonotube® Forms with Rainguard™

When it rains, you pour with Sonoco's new RainGuard™ paper technology, contractors can stay on schedule and avoid costly weather delays.

- One-piece, one time use form. No cleaning, re-oiling or reassembling.
- Lightweight, easy to handle, fast-forming method.
- Save time and money with welded rebar cages for your Sonotube® projects.





Monarch Windows

Available in steel or vinyl for your basement window needs.

- Energy-Efficient Multi-Chamber Frame.
- Multi-Point Lock with Single Lever.
- 7/8" Insulated Glass.
- From 32"X16" to 5'X4' Egress.
- NFRC Certified.



Pour in Place Wood Windows

Wood windows, for an economical advantage.

- Increased energy performance.
- Beautiful, natural light.
- Homeowner peace of mind.



Mar-Flex® Window Wells

- One piece construction.
- Contoured bottom with drain to effectively drain water to drainage tile.
- "Stress Free" molding process makes well capable of enduring extreme temperatures.

Mar-Flex® Foundation Vents

- Telescopic vents, designed for maximum versatility.
- Thermostat Controlled Vents.



Smart Vent Foundation Flood Vents

- Preserves the aesthetic beauty of the homes you build by requiring 2/3 less vents.
- Patented automatic float release vent and bi-directional flood door.
- Code compliant, FEMA accepted, ICC Evaluated.



Plastiform™ Concrete Flatwork Forming System

Plastiform™ is a high density polyethelene plastic form, ideal for jobs requiring radius, straight, curb or gutter construction.

- Resusable forms come with manufacturer 2 year warranty.
- At 1/3 the weight of wood, Plastiform is lightweight and easy to transport.
- Silicon in the boards means less concrete adhesion for easy cleaning.

Scofield Texturetop

SCOFIELD Texturetop is color-matched to the full range of standard and custom colors available and can be used to restore existing interior concrete floors and exterior hardscapes. SCOFIELD Texturetop is a fast-track, low profile, cementitious topping with improved workability, higher strength and attractive integral colors.


- Creates hard, abrasion-resistant wear surfaces.
- Fast setting with rapid strength gain for fast-track installation.
- Excellent moisture and freeze/thaw resistance.
- Wide range of attractive integral colors - standard and custom.
- Economical to install.



ACO Home Drain

ACO Home is a practical, lightweight drainage system for use in light duty areas around the home and garden.

- Stop ends and spigot/stop ends available.
- Interlocking end profiles make installation quick and easy.
- Ideal for efficient, trouble free surface water drainage of light duty, domestic areas.
- Also heavy duty drains for driveways and apartment complexes.

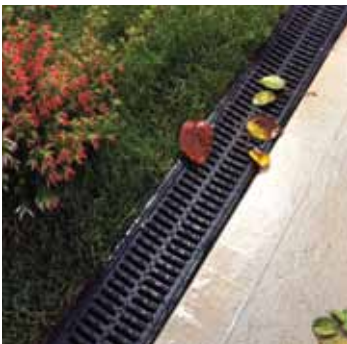

Stego Wrap Vapor Barrier

Stego Wrap Vapor Barrier economical geo-membrane

- Unsurpassed ASTM Testing Results.
- Controls Radon Gas.
- Resistant to Hot/Cold Temperatures.
- Resistant to Soil Chemicals & Pollutants.



Form-A-Key

Form-A-Key Control Joint Systems - the modern metal keyway for concrete flatwork.

- Joint and stake interlock, eliminates joint floating or rising from the stake.
- Eliminates time consuming process of wiring, screwing or nailing joint to a stake or peg.
- Saves on installation time, stakes interlock with joint at any point.





Fibre Expansion Joint

- Provides the ideal product for the majority of all expansion/contraction joint requirements.
- Easy to cut...dimensionally stable...not sticky in summer, or brittle in winter.
- Backed by over 70 years of proven application experience from W.R. Meadows.



Harris Certi-Vex AC1315 Super Gloss

- Quickly forms a hard clear film that is permanent, tough, chemical and slip resistant, water repellent, dustproof, and nonyellowing.
- Ideal for both interior and exterior applications on new and existing floors, stamped and decorated concrete surfaces.
- Contains no fillers, modifiers or extenders that can cause sealers to yellow.



Sikaflex-1a Sealant

Sikaflex-1a, a premium-grade, high-performance, moisture-cured, 1-component, polyurethane-based, non-sag elastomeric sealant.

- Great for expansion and control joints.
- Different colors for decorative concrete.
- Meets Federal specification TT-S-00230C, Type II, Class A. Meets ASTM C-920, Type S, Grade NS, Class 25.



Sikaflex-2c NS/SL Sealant

Sikaflex-2c NS/SL is a 2-component, premium-grade, polyurethane-based, elastomeric sealant. It is principally a chemical cure in a non-sag consistency.

- Meets ASTM C-920, Type M, Grade NS, Class 25, use T, NT, M, G, A, O, I and Federal Specification TT-S-00227E, Type II, Class A. Tested in accordance with ASTM C-1382 for use in EIFS Systems.

Sonneborn NP1 Polyurethane Sealant


Sonneborn NP1 Polyurethane Sealant is designed for a wide range of sealing and caulking applications in active exterior joints.

- Easy to gun and tool.
- Bonds to most construction materials without a primer.
- Weather resistant.
- Wide temperature application range.



Stegmeier Cantilever Deck Forms & Joint Products

- Specialized foam forms for package swimming pool steps.
- Decorative control joint systems available.
- Re-useable slip & join lumber.

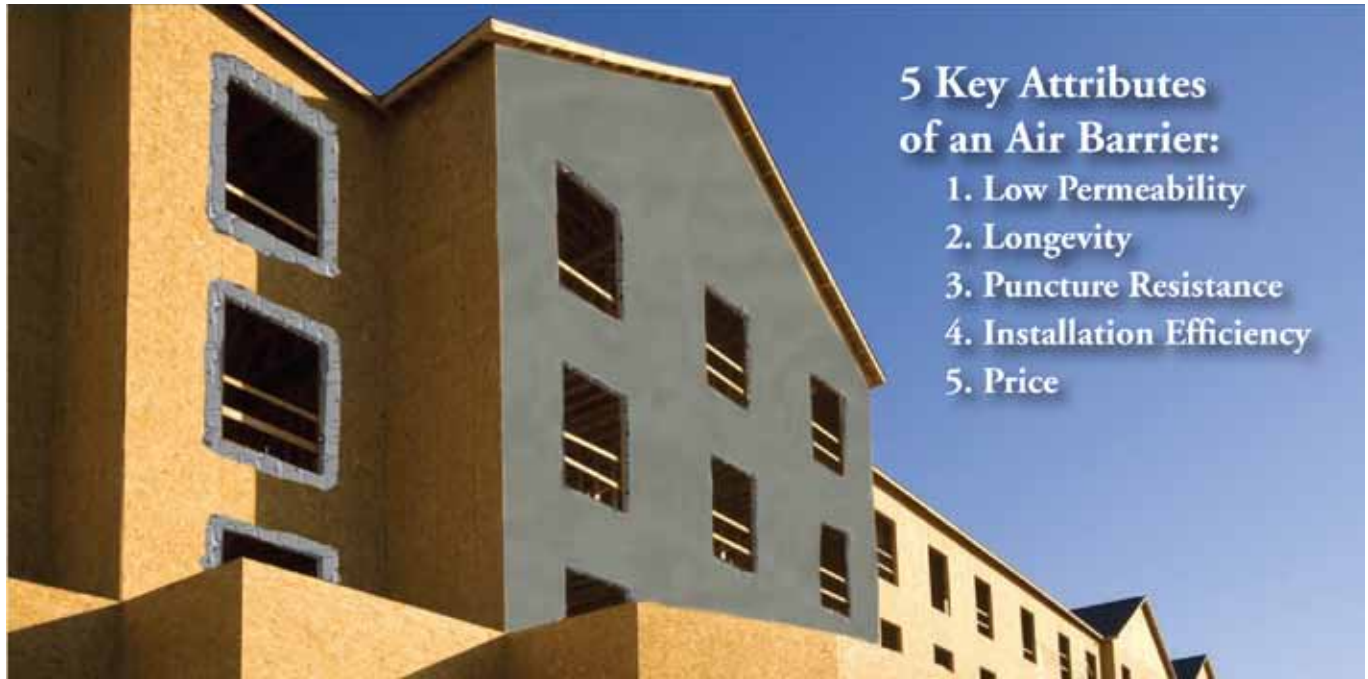

5 Key Attributes of an Air Barrier:

1. Low Permeability
2. Longevity
3. Puncture Resistance
4. Installation Efficiency
5. Price



Air|Barrier Systems

PRODUCT	AIR Barrier 1200 VP	AIR & VAPOR Barrier 1800
Type	Elastomeric Emulsion Water-Based	100% Rubber Polymer Solvent-Based
Features	<ul style="list-style-type: none"> • Low odor • High water vapor-permeance • Low VOC content • Can be applied to damp (or green) concrete • Seals around penetrations and brick ties • Seamless monolithic membrane 	<ul style="list-style-type: none"> • Low odor • Can be applied to damp (or green concrete) • Excellent elongation and recovery • Seals around penetrations and brick ties • Seamless monolithic membrane
Air Barrier	Yes	Yes
Vapor Barrier	No	Yes
Air Leakage	< 0.004 CFM/ft ² ASTM E2178	< 0.0004 CFM/ft ² ASTM E283
Vapor Permeance ASTM E96	12.0 perms	0.08 perms
WaterTightness CGSB 37.58-M86	Pass	Pass
Elongation ASTM D412	1200%	1800%
UV Exposure	Unlimited	30 Days
Application Temperature	Minimum 41° F / 5°C	Minimum 15°F / -9°C
Coverage	23-30 ft ² /gal = 30-40 mil dry thickness	23-30 ft ² /gal = 30-40 mil dry thickness
Dry Time	12-24 hours	12 hours
Color	Gray	Gray
Application Method	Brush, Roller, Spray	Brush, Roller, Spray

A. H. HARRIS & SONS, INC.

Application for Credit

Have you applied for credit with us before? _____ yes _____ no Date: _____

If yes, under what name _____

Firm Name: _____ Phone: _____

DBA: _____

Mailing Address: _____ Fax: _____

Physical Address: _____

City: _____ State: _____ Zip: _____

Type of business (specify): _____

Date started: _____ Estimated annual sales: _____

Please check one _____ Individual Proprietor _____ Partnership _____ Corporation _____ LLC (Limited Liability Corp.)
 Member managed corp.

Corporate Federal Tax #: _____, Tax Exempt #: _____ (include copy)

Additional information required for conditional sales contracts under the Uniform Commercial Code.

Debtor (individual signing contract): _____ Title: _____

Debtor's Social Security # (for Partnership or individual Proprietor): _____

Full name of owner, owners, or authorized officer of Corporation. List home address, zip code and home telephone # for partnership or individual proprietor:

Are you bonded? _____ yes _____ no If yes, provide a copy of each payment bond on a **job-by-job** basis.

Name of Bonding Company: _____ Phone: _____

Estimated monthly purchases: \$ _____ Purchase Order required? _____ yes* _____ no

* Absence of purchase order number shall not constitute grounds for nonpayment of charges for material received by customer.

APPLICANTS' SIGNATURE ATTESTS FINANCIAL RESPONSIBILITY, ABILITY AND WILLINGNESS TO PAY OUR INVOICES WITHIN OUR TERMS OF NET 30 DAYS, PAYABLE IN U.S. FUNDS ONLY.

All information on this form is for the purpose of obtaining credit, and is warranted to be true. I/We hereby authorize A. H. Harris & Sons, Inc., to whom this application is made, to investigate the references listed pertaining to my/our credit and financial responsibility. Further, I/We recognize that A. H. Harris & Sons, Inc. can seek credit and financial information from other sources than enclosed herein. References to A. H. Harris & Sons, Inc. in this Application for Credit shall be deemed to include A. H. Harris & Sons, Inc., its subsidiaries and other affiliates, and its and their successors and assigns.

New technology allows the faxing of original invoices. Faxed invoices will not contain all of the terms and conditions detailed herein. These terms and conditions remain in effect until further notice. I/We acknowledge that the acceptance of faxed invoices is acceptance of all the terms and conditions detailed herein .

All delinquent amounts shall be subject to a late charge of one and one half (1-1/2) percent per month until the balance is paid in full. Should any past due amount require outside collection activity, the applicant agrees to pay all costs associated with such collection activity, including reasonable attorneys fees. All checks returned unpaid for any reason shall be subject to a charge of \$25.00. Merchandise cannot be returned without authorization. Transportation charges must be prepaid on all returned goods. Credit will be based on our count and inspection and will be subject to a restocking charge.

ACKNOWLEDGMENT: (original, signed application must be forwarded to A. H. Harris & Sons, Inc.)

Firm Name: _____

By (please print): _____ Title: _____

By (signature): _____ Title: _____

MUST BE SIGNED BY PRINCIPAL OR AUTHORIZED OFFICER

PLEASE COMPLETE ALL INFORMATION INSIDE THIS FORM

FINANCIAL STATEMENT/PERSONAL GUARANTY

Financial Statement (must be signed) _____ Enclosed _____ Separate Cover _____ N/A

Financial conditions as of _____, 20 _____

From _____ books records _____ estimates (please check one)

Cash on hand and in bank _____	Accounts Payable _____
Accounts Receivable _____	Loans, Notes Payable _____
Notes Receivable _____	(portion due within 1 year) _____
Merchandise or inventory _____	Banks _____
Vehicles, machinery & tools _____	Owners/Officers/Relatives _____
Real estate & buildings (VALUE & DESCRIBE BELOW) _____	Install, Loans, secured by equipment _____
Other assets, specify _____	Notes payable banks _____
	(portion due after 1 year) _____
	Real estate mortgages _____
	(describe below) _____
	Other liabilities, specify _____
	Equity (retained earnings) _____
TOTAL ASSETS _____	TOTAL LIABILITIES & EQUITY _____

REAL ESTATE Address/Description	Title In Name of	VALUE Mkt____ Cost____	Mortgage Balance	Mortgage Due Date	Annl./Mo. Payments	Annl./Mo. Income

PERSONAL GUARANTY

The undersigned _____, residing at _____,
 home telephone number _____, social security number _____,
 for and in consideration of A.H. Harris & Sons, Inc. extending credit to (Firm Name) _____
 (hereinafter "the Company"), hereby personally guarantees to pay on demand to A.H. Harris & Sons, Inc. or its authorized
 agents, any sums due from the Company to A.H. Harris & Sons, Inc., if the Company fails to pay such sums within
 thirty (30) days of invoicing or demand. The undersigned agrees that this personal guaranty shall be continuing and irrev-
 ocable, and agrees to hold harmless and indemnify A.H. Harris & Sons, Inc. for all such sums that may come due.
 The undersigned hereby agrees to the terms contained in the Application for Credit completed on behalf of the Company
 and consents to any modifications or renewals of the terms of credit between A.H. Harris & Sons, Inc. and the Company.

References to A. H. Harris & Sons, Inc. in this paragraph and the Application for Credit shall be deemed to include A. H.
 Harris & Sons, Inc., its subsidiaries and other affiliates, and its and their successors and assigns, and the undersigned's
 personal guaranty shall extend to and include any sums due from the Company to any such party.

DATE: _____, 20 _____ SIGNATURE: _____
(NO TITLE)

WITNESS: _____ SIGNATURE: _____
(NO TITLE)

REFERENCES

Name of Bank: _____ Contact Name: _____

Street Address: _____ Account #: _____

City: _____ State: _____ Zip: _____ Telephone: _____

Former business: _____

Location: _____ Own or rent building? _____

VENDOR REFERENCES

Name: _____ Phone: _____

Address: _____ Fax: _____

City: _____ State: _____ Zip: _____

Contact: _____ Account #: _____

Name: _____ Phone: _____

Address: _____ Fax: _____

City: _____ State: _____ Zip: _____

Contact: _____ Account #: _____

Name: _____ Phone: _____

Address: _____ Fax: _____

City: _____ State: _____ Zip: _____

Contact: _____ Account #: _____

ACCOUNTS PAYABLE INFORMATION

Does your company require a monthly statement? _____ yes _____ no

Accounts Payable Contact Name: _____ Title: _____

FOR OFFICE USE ONLY

Credit approval: ___yes ___no

Authorized by: _____

Credit limit: _____

Accounts#: _____ Salesman #: _____

Customer class #: _____

Date: _____

A. Taxes. Prices of the products sold are exclusively of all city, state and federal taxes (other than income taxes), including, without limitation, taxes on the manufacture, sale, delivery, or use of the goods. Buyer agrees to pay Seller the amount of such taxes for which Seller may be responsible for collection or payment, either in its own behalf or that of Buyer, upon Seller's demand. No claimed exemption from taxes will be recognized unless Buyer furnishes Seller an applicable tax exemption certificate.

B. Term of Payment. Unless Buyer has credit approval from Seller, payment in full is due upon delivery. Unless otherwise specifically agreed to in writing by Seller, payment in full on all credit sales is due thirty (30) days from the date of delivery. All checks are accepted subject to collection.

C. Delivery. Unless otherwise specifically provided in the face hereof:
(1) Delivery shall be made F.O.B. Seller's location specified on the face hereof by delivery of the goods to a carrier for shipment;
(2) Method and route of shipment are at Seller's discretion;
(3) In no event shall Seller be liable in connection with shipment nor shall the carrier be deemed to be the agent of the Seller;
(4) Risk of loss to the goods shall pass to Buyer upon delivery; and
(5) All transportation charges are to be paid by Buyer.

D. Force Majeure. Seller shall not be liable for its delay in performing or its failure hereunder if such delay or failure is due to act of God, war, fire, strike, differences with workmen, accident, transportation delays, equipment breakdown, governmental acts or requirements, delayed receipt of materials from third parties, or other causes, either similar or dissimilar to the foregoing, beyond Seller's reasonable control.

E. Disclaimer of warranty. EXCEPT AS SET FORTH ON THE FACE HEREOF AND EXCEPT AS OTHERWISE SPECIFICALLY AGREED TO IN WRITING BY SELLER, SELLER MAKES NO REPRESENTATION OR WARRANTY OF ANY OTHER KIND, EXPRESS OR IMPLIED, WITH RESPECT TO THE GOODS, WHETHER AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER MATTER.

F. Notice of Claims. Immediately upon receipt of the goods, Buyer shall inspect the same. Any claim for shortage must be made within ten (10) days after Buyer's receipt. All other claims, including claims for alleged defective goods, must be made within fifteen (15) days after Buyer learns of the facts upon which such claim is based, but in no event later than thirty (30) days after Buyer's receipt of the goods. All claims not made in writing and received by Seller within the time period specified above shall be deemed waived. With respect to any defects incapable of discovery until in use all claims for any damages or losses as a result of such defects shall be deemed waived unless made in writing and received by Seller within one (1) year after Buyer's receipt of the goods or within fifteen (15) days after Buyer learns of the alleged defect giving rise to the claim, whichever shall first occur, and after the expiration of either of said periods, Buyer expressly assumes all liability for all such damages or losses, irrespective of any use which shall have taken place or whether the alleged defect shall have occurred or been discovered prior to expiration of such periods. The customer acknowledges that it has special skill and knowledge in the selection and use of the equipment and material to be purchased or rented from A.H. Harris and expressly disclaims any reliance upon any statements or representations made or to be made by A.H. Harris regarding the sale, rental, or repair of any material or equipment.

G. Limitation of Liability. BUYER'S EXCLUSIVE REMEDY FOR CLAIMS ARISING HEREUNDER SHALL BE FOR DAMAGES. SELLER'S LIABILITY FOR ANY AND ALL LOSSES AND DAMAGES TO BUYER RESULTING FROM ANY CAUSE WHATSOEVER INCLUDING SELLER'S NEGLIGENCE, ALLEGED DAMAGED OR DEFECTIVE GOODS, IRRESPECTIVE OF WHETHER SUCH DEFECTS ARE DISCOVERABLE OR LATENT, SHALL IN NO EVENT EXCEED THE PURCHASE PRICE OF THE PARTICULAR GOODS WITH RESPECT TO WHICH LOSSES OR DAMAGES ARE CLAIMED, OR, AT THE ELECTION OF THE SELLER, THE REPAIR OR REPLACEMENT OF DEFECTIVE OR DAMAGED GOODS. IN NO EVENT, INCLUDING IN THE CASE OF A CLAIM OF NEGLIGENCE, SHALL SELLER BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

H. Security Interest. Seller reserves a purchase money security interest in each item of the goods listed on the face of the invoice in the amount of their purchase price. Such security interest will be satisfied only by payment in full. Buyer agrees to execute at Seller's request a security agreement and financing statement deemed necessary or desirable by Seller to perfect its security interest in the goods. Nevertheless, a copy of this Agreement may be filed with the appropriate state authorities at any time after signature by the Buyer as financing statement in order to perfect Seller's security interest.

I. Default. In the event any proceedings, voluntary or involuntary, in bankruptcy or insolvency by or against the Buyer, or if Buyer shall be unable to meet its debts as they come due, or in the event of the appointment of a receiver or an assignee for the benefit of creditors of Buyer or in the event Buyer shall fail to pay any amount to Seller when due, or if Buyer shall breach any of its other obligations hereunder, then and in any such event Seller may cancel any unfulfilled part of this Agreement, without liability, and Buyer shall be obligated to Seller for all costs and expenses, including court costs and attorney's fees incurred by Seller in collecting the amount due from Buyer. In any such event Seller shall have all of the rights of a secured party under the Uniform Commercial code. BUYER AND SELLER ACKNOWLEDGE AND AGREE THAT THIS AGREEMENT CONSTITUTES A COMMERCIAL TRANSACTION AND THE BUYER HEREBY WAIVES ANY RIGHT TO NOTICE AND HEARING UNDER APPLICABLE STATE AND FEDERAL LAW WITH RESPECT TO ANY PREJUDGMENT REMEDY WHICH SELLER MAY SEEK TO OBTAIN AGAINST BUYER. The rights and remedies reserved hereunder to Seller are cumulative and in addition to any other or future rights or remedies provided at law or in equity.

J. Entire Agreement. These terms and conditions, together with the matter set forth on the face of the invoice, constitute the entire understanding and agreement of the parties. No changes in or additions to these terms and conditions shall be made except in writing and signed by Seller's and Buyer's authorized representatives.

K. Applicable Law. This Agreement shall be governed by and construed in accordance with the law of the State in which Seller's location specified on the face of the invoice is located.

L. Lease Transactions. If this is a lease transaction, the terms of the lease agreement between Seller and Buyer shall prevail in the event of any conflict between the terms of such lease agreement and the terms of Paragraphs A through K above.

A.H. HARRIS & SONS, INC.
Credit Manager

367 Alumni Road
Newington, CT 06111
Responsible for: Connecticut, Western Massachusetts, Vermont

860/665-9400
Fax 860/665-9401

255 West Road
Portsmouth, NH 03801
Responsible for: New Hampshire & Maine

603/436-3833
Fax 603/431-8593

10 West Mill Street
Medfield, MA 02052
Responsible for: Central & Eastern Massachusetts, Rhode Island

508/359-7321
Fax 508/359-2491

3220 Bordentown Avenue
Old Bridge, NJ 08857
Responsible for: New Jersey & Metropolitan, NY

800/345-9055
Fax 732/727-9510

17 Commercial Avenue
Albany, NY 12205
Responsible for: New York State

518/438-3976
Fax 518/438-3925

2010 Apperson Drive
Salem, VA 24153
Responsible for: Virginia

800/468-0155
Fax 540/776-0044

except Rockland & Westchester Counties

Corn Shop Rd.
Fryeburg, ME 04037



207/935-3531
Fax 207/935-3058

www.ahharris.com



BASF Waterplug®

A blend of hydraulic cements, well graded sands and additives supplied in dry powder form. It requires only the addition of clean water to produce a ready-to-use, ultra-rapid setting, plugging mortar.

- Chloride-free, will not promote corrosion of reinforcement.
- Expands as it sets to ensure a permanent watertight seal.
- Ultra-rapid setting for instant leak plugging.
- Cement based, contains no toxic elements.



Carlisle CCW MiraDRI 860/861

The CCW MiraDRI waterproofing system is designed to provide waterproofing protection for below grade foundation walls, slabs, parking decks, plaza decks, tunnels and many other interior and exterior applications.

- Consists of a self-adhering membrane, environmentally friendly water based primer for surface preparation.



Volclay Water-Stop RX

Water-Stop RX is a sodium bentonite based waterstop designed to stop infiltration through cast in place concrete construction joints by expanding upon contact with water to form a positive seal against the concrete.

- Contains 75% sodium bentonite which provides superior expansion to seal and fill voids and cracks in concrete.
- Eliminates the requirement of special pieces, split forming and seam welding.



Mar-Flex® 5000™ Waterproofing

Mar-Flex® 5000™ Waterproofing is a tested and proven membrane that can be applied over almost any clean, dry, sound substrate. Its permanent elasticity allows it to move with the structure.

- Will not become brittle or inflexible. Will not evaporate. Resists freeze-thaw cycles.
- Tough polymer waterproofing membrane.
- Can be used with any of the Mar-Flex® Drainage Boards.
- Warrantee available for up to 60 years.



Mar-Flex® Foundation and Cavity Wall Coating

Mar-Flex® Cavity and Wall Foundation Coating is a heavy bodied cutback asphalt protective coating used when dam proofing is required. It forms a smooth, tough, almost rubber like film when dry.

- Compatible with Mar-Flex® Drainage and Insulation Boards.
- The durable film bonds to most, clean, dry and firm surfaces.



Mar-Flex® Insulation and Drainage Boards

Mar-Flex® Insulations Boards

- Available in a variety of materials and sizes.
- Offers protection for waterproofing and damproofing membranes.

Mar-Flex® Shockwave™ Drainage Boards

- Acts as a powerful shock absorber, protects wall and membrane
- Filter fabric protects against silting
- Industry-leading warranty



Sonneborn® HLM 5000

Liquid cold-applied elastomeric waterproofing membrane system.

- Wide service temperature range.
- Chemical resistant.
- Waterproofs concrete.



Basement Crack Repair Kits from MarFlex

Marflex crack injection and anchoring urethanes are polyurethane liquids designed to block water infiltration or exfiltration.

QuickFoam Fine Urethane is a 2-Part hydrophobic polyurethane liquid with a 600 cps, best suited for hairline cracks and larger. Once introduced to water, a built-in catalyst reacts to form a closed-cell barrier that prevents water penetration.

QuickFoam Broad Urethane is a 1-Part hydrophilic polyurethane liquid with a 100 cps, best suited for cracks that are 1/8" or wider and actively leaking. When mixed with water, the product reacts within 30 seconds to create a closed-cell barrier that prevents water penetration.



Silpro Concrete Finish

Silpro Concrete Finish is a Portland cement based, water resistant coating that is easy to apply and withstands severe climatic conditions. Use on any building facade that needs an aesthetically pleasing, impact resistant finish.

Silpro FSB

Silpro FSB is a polymer modified, Portland cement based, fiber reinforced, high performance surface bonding mortar blended with an integral waterproofing agent. FSB may be used over dry stacked concrete block to produce a wall stronger and more water repellent than one laid with conventional mortar joints.



Silpro C-21

Silpro C-21 Acrylic Admix is used to enhance the performance properties of cementitious mortars. C-21 Acrylic Admix, when used as an admixture densifies the mortar, improves flexural and tensile strengths as well as abrasion resistance.

Silpro California Stucco is a Portland cement based, water resistant coating that is easy to apply and withstands severe climatic conditions. It may be applied in a great many textures and is a low maintenance finish.



Silpro Masco®

Silpro Masco® is a two component, polymer modified, Portland cement based, structural repair mortar and underlayment. Use Masco® for interior and exterior restoration of deteriorated concrete. Masco is trowel applied on horizontal or vertical surfaces. Masco® may be used as an exposed industrial wear surface or as an underlayment for resilient, carpet, laminate, ceramic tile and wood flooring. Masco® may be applied from a featheredge to 1/2" thick.



Silpro Mascrete™

Silpro Mascrete™ is a two component, polymer modified, portland cement based, structural repair mortar. Use Mascrete™ for interior and exterior restoration of deteriorated concrete elements and slabs. Mascrete™ may be poured into forms or used in horizontal applications. Mascrete™ may be used as an exposed industrial wear surface or as an underlayment for resilient, carpet, laminate, ceramic tile and wood flooring, from 1/8" to 3".



Emaco® R310 CI

Emaco® R310 CI repair mortar is a one component, fast setting, polymer-modified, shrinkage compensated cement based mortar with an integral corrosion inhibitor

Emaco® R350 CI

Emaco® R350 CI repair mortar is a high yield, one component, polymer-modified, shrinkage compensated lightweight renovation mortar that contains an integral corrosion inhibitor. The product is ideally suited for patching and/or resurfacing distressed concrete.



SikaRepair 222

SikaRepair 222 is a one component, early strength gaining, cementitious, patching material for horizontal repair of concrete.

SikaSet Mortar

SikaSet Mortar is a rapid setting, Portland cement based patching compound.



SikaRepair 223

SikaRepair 223 is a one-component, early strength gaining cementitious, patching material for vertical and overhead repair of concrete.

SikaRepair 224

SikaRepair 224 is a one-component, prepacked, ready to use cementitious, silica fume, fiber reinforced, high strength shrinkage compensated mortar. Formulated for application by trowel or low pressure spray.



Invisible Structures Gravelpave² Gravel Porous Pavement

Gravelpave² porous paving allows you to park, drive, walk, or ride on a beautiful decorative gravel surface.

- Available in colors to match specialty stone.
- Easy to install. Just roll out and fill with gravel.



Invisible Structures Rainstore³

Rainstore³ is a modular plastic structure used to store stormwater underground, replacing retention and detention surface ponds.

- 94% Void Structure for Water Storage.
- Eliminates Stone Requirements.
- Easy and lightweight installation.



Synteen Geogrids

Geogrids are the perfect solution for your soil reinforcement needs. The Synteen SF Series Geogrids in soil create a composite soil mass of increased strength.

- Lightweight. No special tools or equipment for placement.
- Flexible. Conforms to soil.
- Cost effective. Reduces labor. Enables structures to be created with lower priced fill materials.



Silt Fence

Harris Silt Fence provides the required soil filtering efficiency and control to contain sediment. Harris Silt Fence is a UV stabilized woven polypropylene geotextile. It is available with or without hardwood posts. It is also available with plastic mesh or wire mesh backing.

- Colored line indicates proper toe-in depth of placement.
- Economy grade available with 4' posts at 10' spacing.



Woven and Nonwoven Fabrics

A.H. Harris offers woven and nonwoven fabrics for drainage and reinforcement.

- Erosion control and cushioning.
- Paving and pavement repair.
- Filtration/Drainage of water.
- Separation of materials.
- Stabilization of weak soils.



Profile Flexterra® FGM

Flexterra® spray applied growth medium, for erosion control and revegetation.

- Effective immediately - no cure time required.
- Less expensive than blankets-less soil preparation is required.
- Fastest turf establishment-1500% water holding capacity delivers more moisture to the seedbed for better germination.

Terra Aqua Gabions

Gabions offer a hard armor erosion control protection combined with the versatility, durability, strength and aesthetics needed to provide a natural looking earth retention structure.

- Available in galvanized steel or PVC coated wire mesh.



Invisible Structures Grasspave² Grass Porous Pavement

Grasspave² allows you to park, drive, walk, or ride on a beautiful grass surface. It performs the functions of asphalt and concrete pavement without the problems of stormwater runoff, and with the aesthetics of a lawn.

- Pervious Load Bearing Surface.
- Heat Energy Reflection Reduction, a “Cooler” Surface.
- Easy to install. Just roll out, fill and then place sod or hydro seed.



Triangular Silt Dike

Triangular Silt Dike is an easy to install and economical alternative to silt fence, hay bales and rock check dams.



Curlex® Erosion Control Blankets

Curlex® excelsior blankets are specifically designed to promote ideal growing conditions for seed and vegetation while protection from wind and water erosion.

Curlex® NetFree™

A 100% biodegradable erosion blanket manufactured with an engineered cut of Great Lakes Aspen excelsior wood fiber.

- Reduces entrapment of wildlife and pets.
- Curlex® NetFree™ is 100% biodegradable, no more waiting for netting to decompose.





Whiteman Walk-Behind Power Trowel

Whiteman's high-performance walk-behind power trowels offer the high-torque horsepower required for floating applications, burnishing and float-pan use.

- A wide variety of models are available ranging from 24- to 48-inch-ring diameters; 2.5- to 13-horse power.
- Perfect for accurate troweling of small to medium areas.
- Rugged parts, solid engineering and a variety of options make Whiteman standard walk-behind trowels a popular choice.



Vibra Strike Power Screed

Screeds either wet or form to form. Provides a honeycomb free, first bull float finish.

- 1.5 horsepower Honda/GX35 Engine.
- Megaflex cable housing and four 1-1/2", 40 durometer SBR rubber bushings for vibration isolation.
- Adjustable vibrator head.



Husqvarna (Partner) K750 Gas Powered Saw

- Compact design and functional ergonomics.
- New Active Air Filtration™.
- Clear level window on tank.
- Wet cutting kit with easily adjusted water flow.
- Reversible cutting arm.
- Husqvarna (Target) diamond blades available.



Harris Diamond Blades

- Long wearing.
- Man-made diamond crystals allow for more consistent blade manufacturing. Various styles of blades for many types of uses on any type of material.

DeWalt Heavy-Duty 18V Cordless Pencil Vibrator Kit



- 1-1/8" diameter vibrator delivers maximum consolidation power.
- 4 foot long flexible shaft for easy use and long reach.
- 14,000 VPM (under load) delivers maximum consolidation efficiency.



Bosch Brute™ Breaker Hammer

The plug-in anywhere hammer.

- Absorbs vibration to reduce operator fatigue.
- Total portability.
- No compressor needed.

Powers® Fasteners



High performance steel, anchors and adhesives for virtually all applications in concrete, brick, block and stone.

- Stud Anchors
- Wedge Bolts
- Adhesives Anchors
- Foam



Custom Leather Craft Gloves

Form fitted support, high dexterity gloves.

- Texture grip palm pads for a better grip and durability.
- Flexible, Neoprene wrist cuff.
- Tough, durable, synthetic leather resists shrinking, stretching and hardening.

HARRIS 1500 CLAMP SYSTEM

Made by Americans
Made for Americans
Imperial Dimensions
Six Panel Heights
Six Panel Widths
Lightweight
1500 PSF

For more information visit our website:
www.ahharris.com

A.H. Harris & Sons, Inc.



CONSTRUCTION SUPPLIES



INTRODUCING TRUFORM™

AVAILABLE EXCLUSIVELY FROM A.H. HARRIS

11 ply structural grade HDO Douglas fir plywood provides high strength and maximum durability

Entire panel is precision-machined on all four sides for unexcelled precision in width, length, and squareness

Both the **inside and outside edges are chamfered**, for longer panel life and easier handling

Plywood panel corners rounded for greater resistance to abuse

All plywood edges sealed and strengthened with two coats of industrial epoxy paint for long life

High-strength steel panel bars, formed with extra deep reinforcement for greater strength

Rust resistant zinc plating on panel bars and fasteners

Learn more about TRUFORM™:

www.ahharris.com/Truform

Find the Harris location nearest you:

www.ahharris.com/locations



Demand the Best from Your Construction Materials Supplier



Customer Service



Well Stocked Showrooms



Delivery Available



Inventory

- Supplies and materials ready for distribution to any site.
- Local, conveniently located Harris stores offer a comprehensive selection of tools and equipment under one roof.
- One of the industry's largest trucking fleets delivers project requirements - without delay.
- Harris engineers use CAD capabilities to create precise, accurate presentations.
- Harris Account Managers provide in-depth product knowledge, on the job assistance and application advice.
- Harris inside sales solve problems and answer questions. They give customers up-to-date advice on product usage, availability and options.

For more information or to contact an A.H. Harris location visit our website:

www.ahharris.com

A.H. Harris & Sons, Inc.®



CONSTRUCTION SUPPLIES

Since 1916